

# WALL WASHER/INDIRECT WALL MOUNT BI-LYTER

Page 1 of 2

SURFACE FLUORESCENT 2' LENGTH, 1 LAMP TT5  
4' LENGTH, 2 LAMP TT5 OR 1 LAMP T8

## FEATURES

- Same fixture can be used as a wall washer when ceiling mounted, or for indirect lighting when wall mounted.
- When wall mounted, ideal for indirect lighting small offices or corridors.
- When ceiling mounted, ideal for lighting chalk boards, bulletin boards, wall displays or any vertical surface.
- Only 4" deep.
- Meets ADA when wall mounted.
- Soft rounded corners and edges create an elegant appearance.
- 20 gauge cold rolled steel body.
- Die-cast aluminum end caps.
- Specular reflector.
- 4' unit 2-TT5 or 1 T8 lamp.
- 2' unit TT5 lamp.
- Off white baked acrylic finish (standard).
- Can be used in continuous rows.
- Meets NYC Code Requirements.




Wall Washer




Indirect Wall Mount

## MOUNTING METHODS

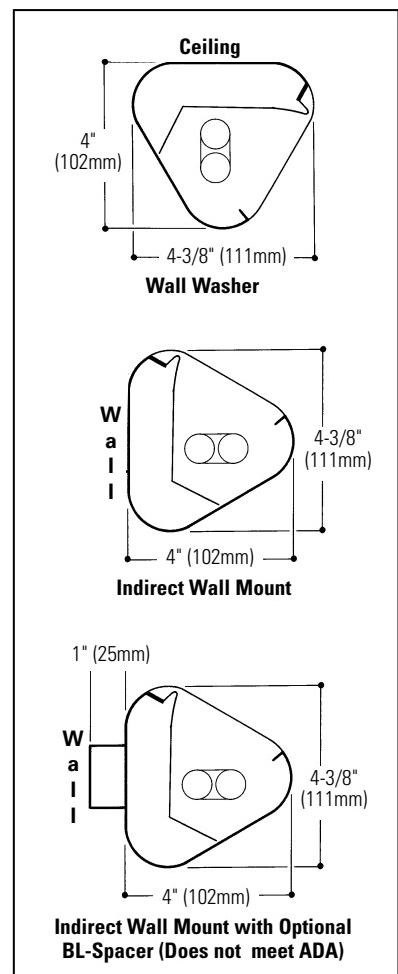

## DIMENSIONS

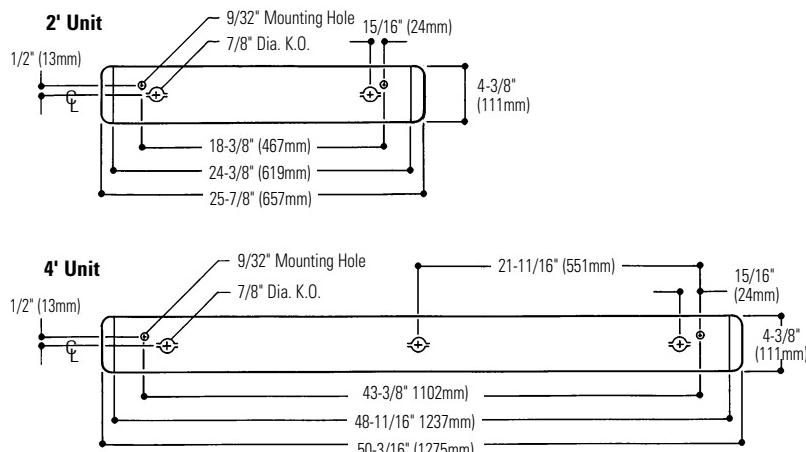

### Job Information

Job Name:

Cat. No.:

Lamp(s):

Volts/Ballast:

### Type:

**LIGHTOLIER**

**Lightolier** a Genlyte Thomas Company

[www.lightolier.com](http://www.lightolier.com)

Technical Information: (978) 657-7600 • Fax (978) 658-0595

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

© 2002 Genlyte Thomas Group LLC (Lightolier Division)

A0902

**Section 5/Folio K10-31**

